


# Smooth Lift Cordless Roller




## Mounting Dimensions

- Minimum depth for flush inside mount including installation brackets:  $1\frac{3}{4}$ "
- Minimum inside mounting depth:  $1\frac{1}{4}$ "
- Minimum outside mounting depth: 1"



**Shades measuring 19½" to 30":**  
A = 1½"  
B = 1⅝"  
C = 2¼"  
D = 1¼" Roller

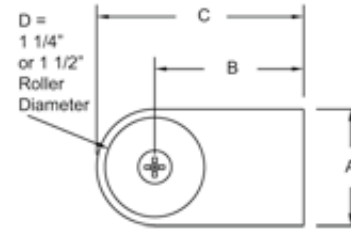

**Shades measuring 30⅛" to 95":**  
A = 1¾"  
B = 1¾"  
C = 2¾"  
D = 1½" Roller