

Simplicity Rechargeable Motor Replacement - With Headrail

Step 1: Remove the shade from the window

- To remove the shade from brackets, place a flathead screwdriver between the bracket and the shade and twist to release the shade from the bracket.




Step 2: Remove the end cap

- Remove the end cap from the motor end, by placing a fat head screwdriver under each pin (see diagram below) and lift. Once the pin is slightly up, grip the pin and pull out. (A needle nose plier may be used to grip the pin better). Once the pins are removed, slide the end cap off the shade. The end cap has a snug fit so slightly tapping on the end cap may be needed.



Step 3: Slide the motor out of the tube

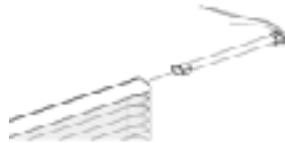


Step 4: Replace the motor

- Slide the motor out of the tube. Before inserting the new motor, slide its black rubber crown over to the end making sure the groove in the crown lines up to the raised notch on the motor. See blue arrow below pointing to the Crown groove.



- Then insert the new motor into the end of the roller tube, with the motor head and red button facing down. This will allow access to the red button for programming. See photo below;

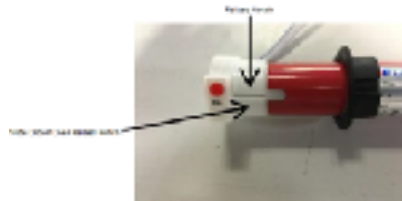

Step 4: Replace the end cap

- Replace end cap and tap the end cap pins back into place, then snap shade back into brackets. Follow installation instructions to set limits.