



PREMIUM Motor Drive Replacement

Note: There are different size motor drives depending on the application. Your drive may appear different than the one illustrated in these instructions.


1. The drive is attached to the end of the motor opposite of where the motor cord attaches. The drive is identified by the arrow in the illustration below.

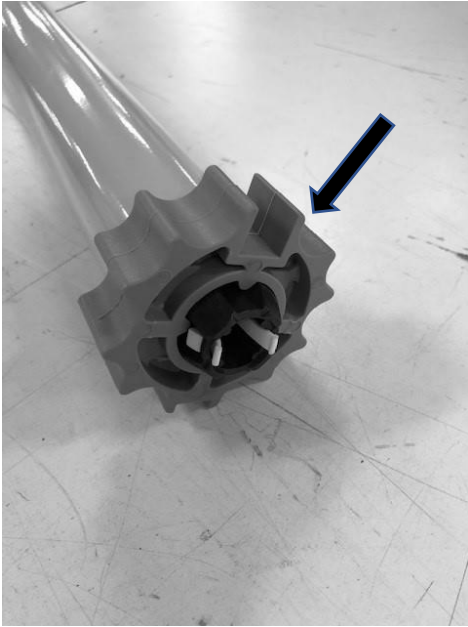

2. Pinch the two white tabs together.

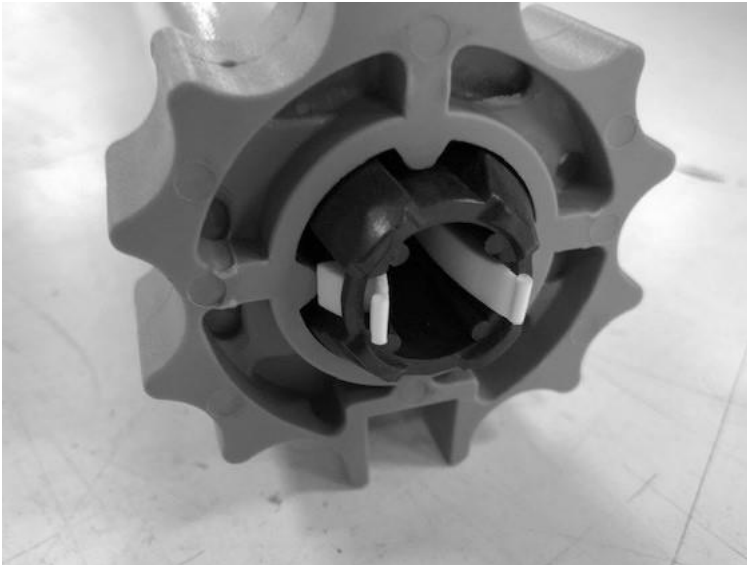

3. Holding the tabs together, slide the Drive off the end of the motor.

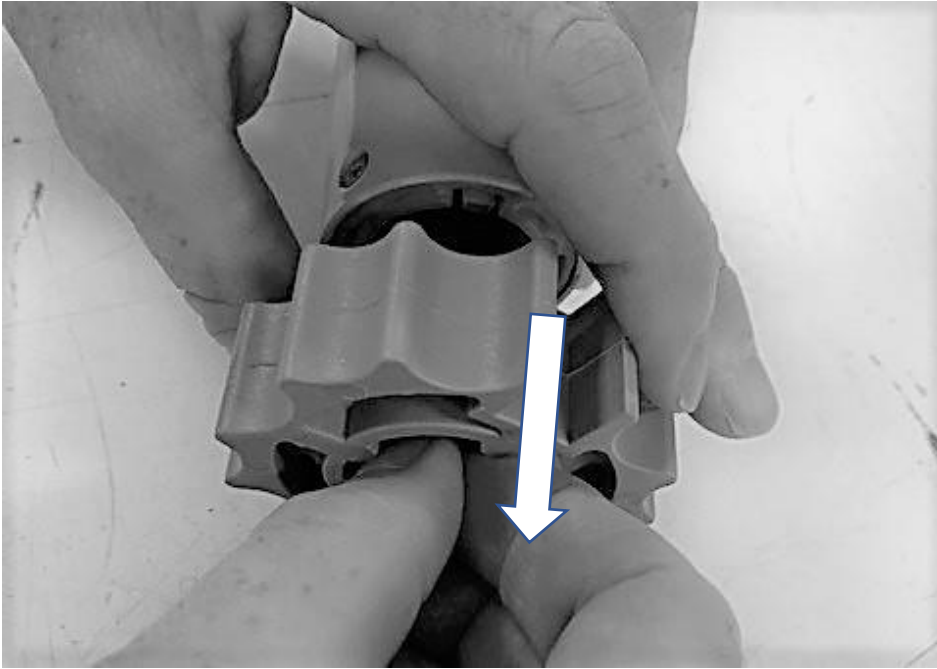

4. Slide new Drive on to the motor and ensure white tabs hold it securely in place.

